

APC500™

USES:

Floors, walls, kitchen appliances, hard surfaces, and carpet. Also safe to use in livestock trucks, pits and parlors.

DIRECTIONS:

Dilute Apc500 with clean water. Fill a trigger spray bottle and spray surface visibly wet. Soak area if desired. Wait 1-10 minutes and wipe dry with squeegee or microfiber cloth. Repeat as necessary.

INGREDIENTS:

Guaranteed Minimum 2 Million CFU/mL, total probiotic cultures, Purified Water, Organic Apple Cider Vinegar, Yucca Extract, Organic EM-1 Microbial Inoculant, Organic Grape Alcohol, Organic Apple Juice Concentrate, and Organic Guar.

JOB	DILUTION RATE Apc500: Water	MACHINES
Stone, Tile, Marble, & Concrete	2-6oz per gallon 1:20-64	1-2oz per gallon 1:64-128
Carpets	2-4oz per gallon 1:32-64	2-6oz per gallon 1:20-64
Stoves & Hoods	4-6oz per gallon 1:20-32	4-6oz per gallon 1:20-32
Wood	4-2oz per gallon 1:64-128	4-2oz per gallon 1:64-128
Glass & Plastics	1/2oz-1oz per gallon 1:32-1:64	1/2oz-1oz per gallon 1:32-1:64

0	Health
0	Flammability
0	Physical Hazard
0	Personal Protection



Apc500™ is a safe, all-natural low-foaming all-purpose cleaner, degreaser, and deodorizer. Regular use of Apc500™ will not corrode equipment. Apc500™ is safe on all surfaces and may be used in steam or mechanical cleaning machines. For best results, use microfiber cloths when cleaning.

Keep this and all cleaning products out of reach of children. Test on delicate surfaces for dilution rates.

Contains no preservatives, phosphorus, detergents, or surfactants.

Shake well before using. Best used within one year after opening. Store at room temperature in a sealed container out of direct sunlight.


BATCH NUMBER:



Made in the USA
 Manufactured by TeraGanix, Inc.
 Alto, Texas 75925
 www.teraganix.com



BEST USED BY:

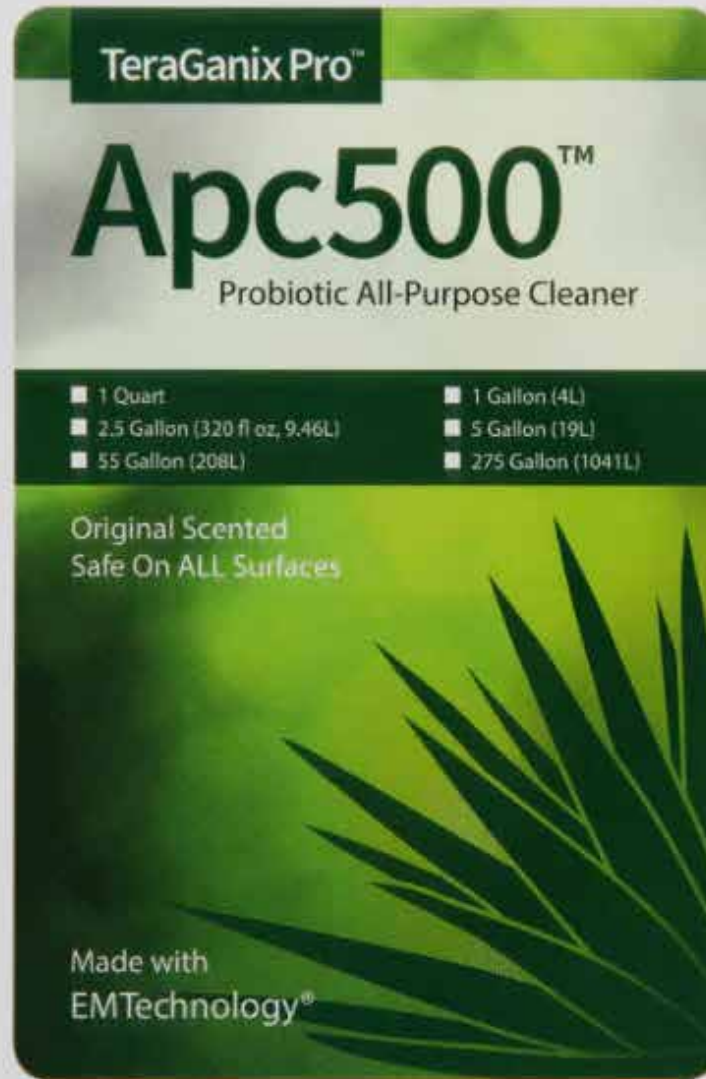

Uses

Floors, walls, kitchen appliances, hard surfaces, and carpet. Also safe to use in livestock trucks, pits, and parlors.

Directions

Dilute Apc500™ with clean water. Fill a trigger spray bottle and spray surface until visibly wet. Soak area if desired. Wait 1-10 minutes and wipe dry with squeegee or microfiber cloth. Repeat as necessary.

Suggested Dilution Rates:

JOB	DILUTION RATE	MACHINES
	Apc500™ : Water	Apc500™ : Water
Stone, Tile, Marble, & Concrete	2-6oz per gallon 1:20-64	1-2oz per gallon 1:64-128
Carpets	2-4oz per gallon 1:32-64	2-6oz per gallon 1:20-64
Stoves & Hoods	4-6oz per gallon 1:20-32	4-6oz per gallon 1:20-32
Wood	1-2oz per gallon 1:64-128	1-2oz per gallon 1:64-128
Glass & Plastics	1/2oz-1oz per gallon 1:32-1:64	1/2oz-1oz per gallon 1:32-1:64

Ingredients

Guaranteed Minimum 2 Million CFU/mL total probiotic cultures, Purified Water, Organic Apple Cider Vinegar, Organic Yucca Extract, Organic EM1 Microbial Inoculant, Organic Grape Alcohol, Organic Apple Juice Concentrate, and Organic Guar.

Disposal

Drain disposal.
 Recycle packaging.

H	Health
F	Flammability
P	Physical Hazard
D	Personal Protection