Operation Instruction

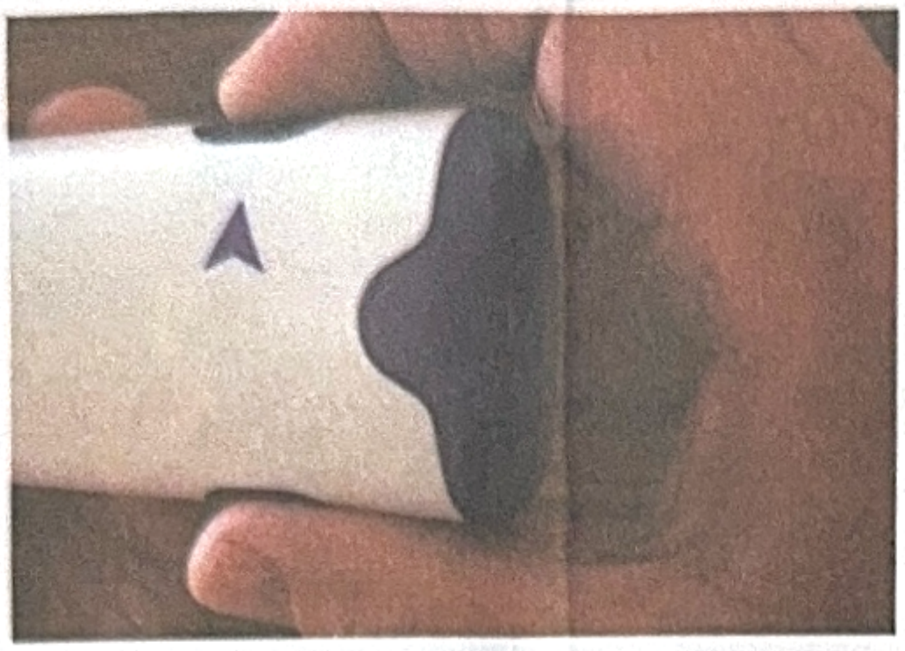

1. Press the clips on both sides of the handle at the same time to release the battery compartment.

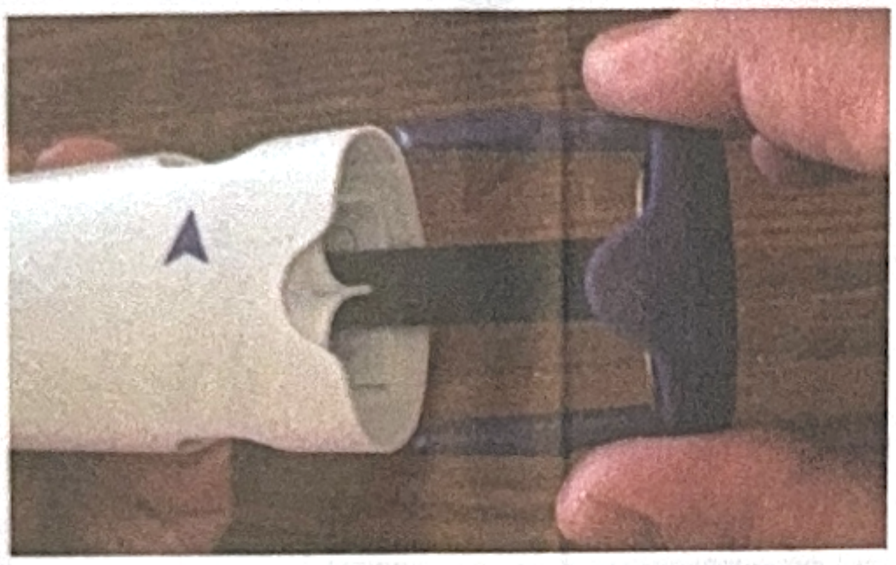

2. Pull the colorful end all the way out carefully till the black tether reaches inside stop point.

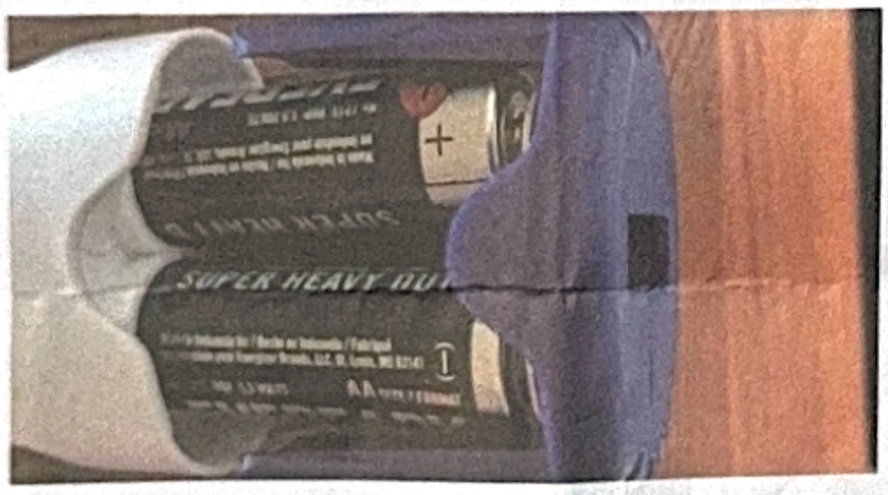

3. Insert 2 AA batteries into the compartment. The negative end(-)of one battery and the positive end(+)of another battery should be oriented as shown above. There is clear indication engraving on the end part of the product, make sure that the inserted batteries' end match the markings.

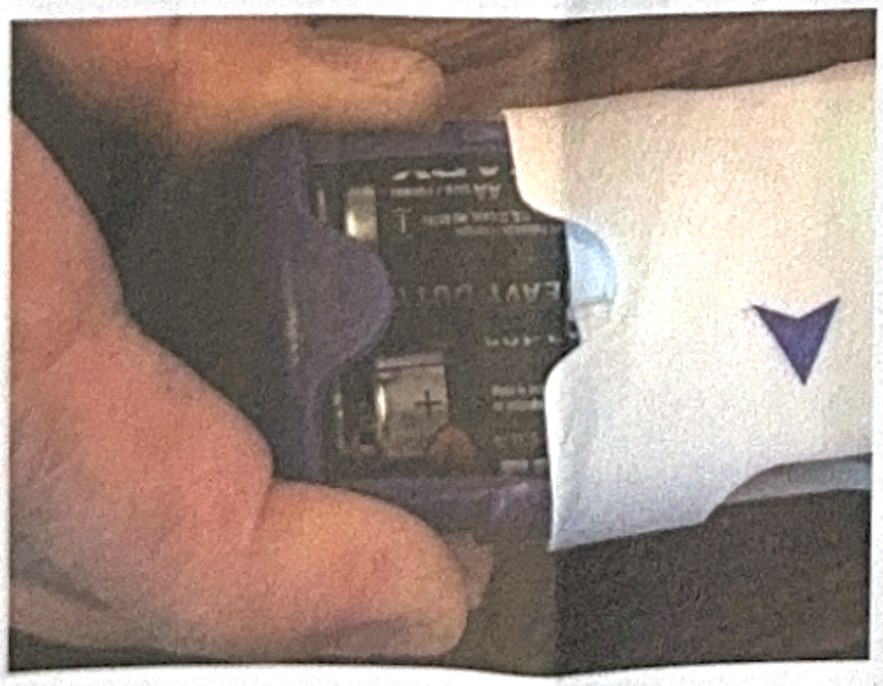

4. Press lightly both side clips and put the batteries into the compartment till hearing a click. The product is ready with illumination.

5. Press the push button and hold for 3 seconds and the illumination is now on(this is the feature of time lag switch). If press the button another time, the level of illumination will be changed. To turn off the light, you need to push the button and hold for 3 seconds.